

# JOB WELL DONE No.101 US Land Well

“P<sup>3</sup>, **P**erfect Cement **P**lug **P**lacement  
System”


“A disposable cement stinger system  
that reliably places balanced cement  
plugs in wells ”

This document contains confidential information

- Ran +/-2500ft of 2.7/8” Tubing as cement stinger c/w P3 Disconnect Tool
- Ran +/-5000ft of 5” Drill Pipe as deployment string
- Tagged TD at +/-7500ft
- Mixed and pumped +/-280bbls of +/-16ppg cement slurry
- Released Drill Pipe Wiper Dart to activate hydraulic P3 Disconnect Tool
- Pumped +/-88bbls of Mud to balance 2500ft long cement plug
- Bumped Dart with +/-1100psi and activated hydraulic disconnect
- Released +/-2500ft of Tubing
- Picked up +/-2 stands of Drill Pipe and WOC
- POOH

**JOB WELL DONE**

# Cementer's Chart

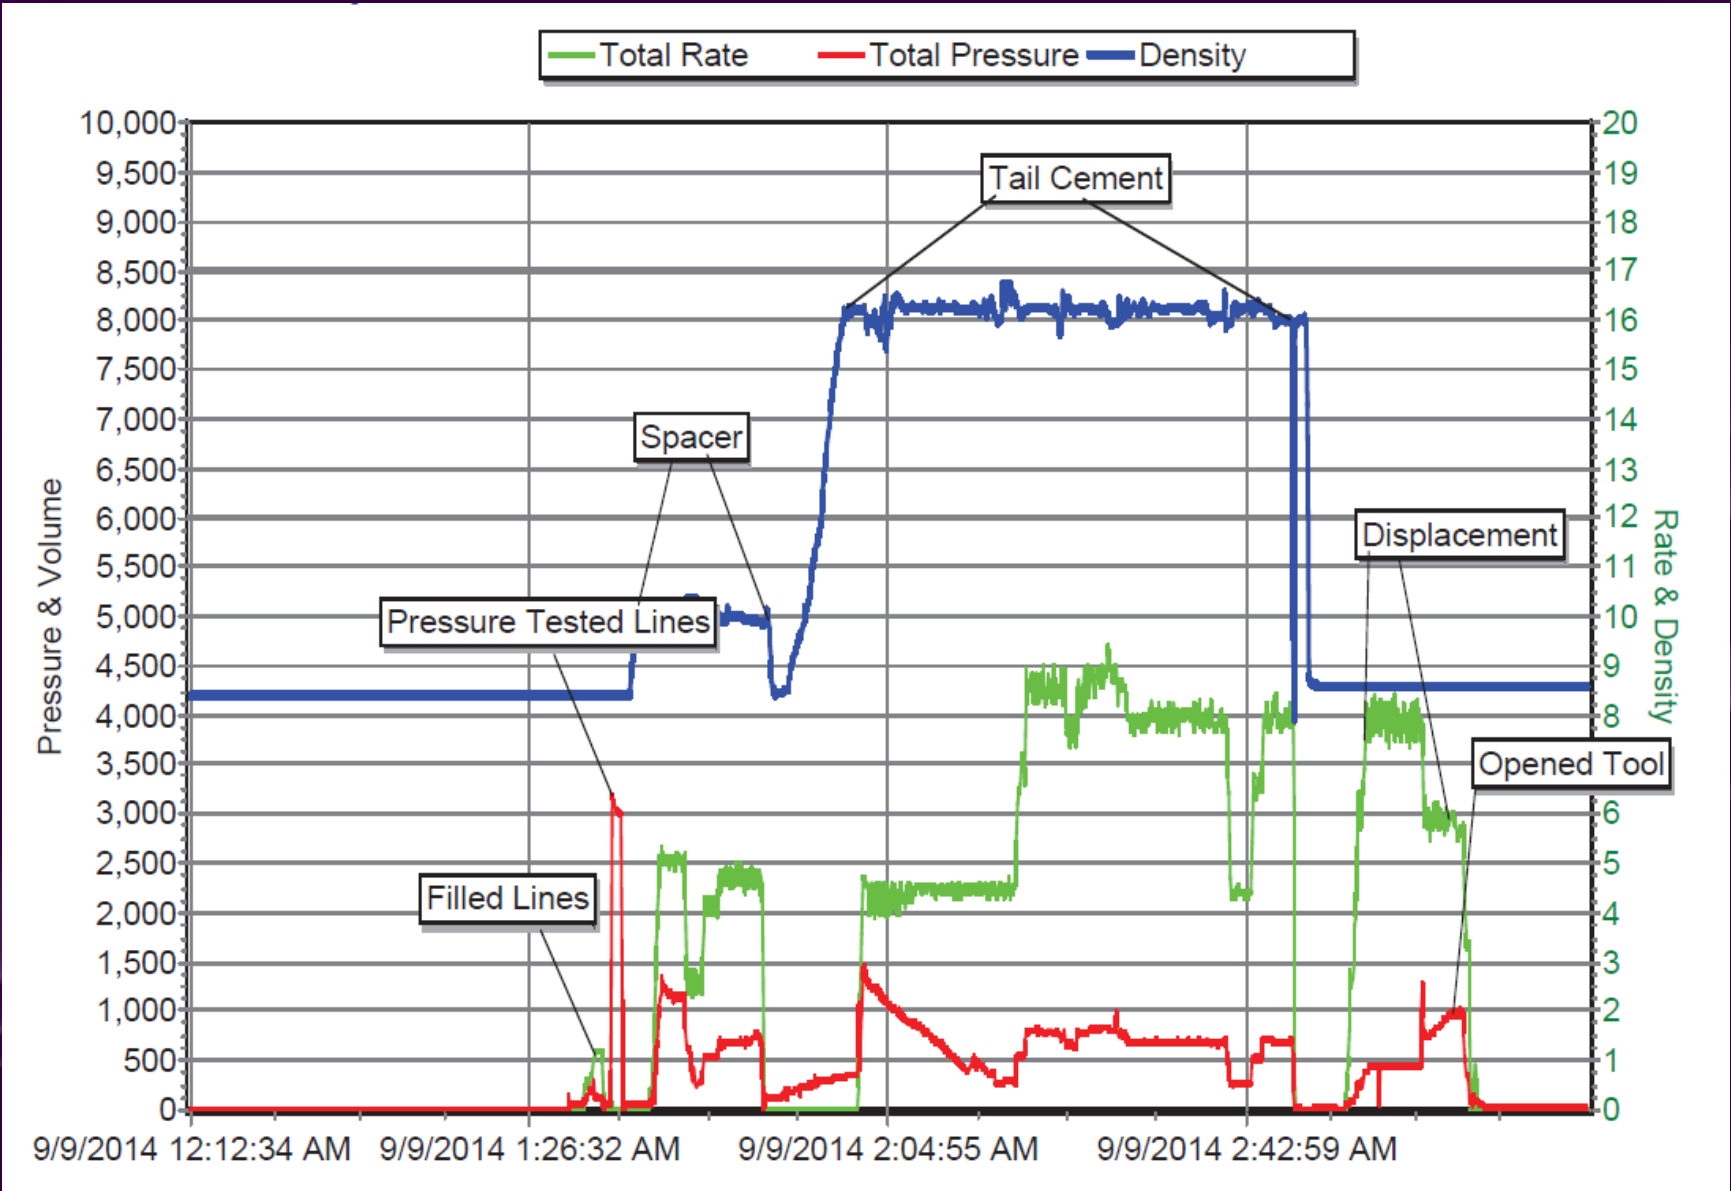


SUDELAC®

Drill-Pipe Dart

5" Drill Pipe (5000ft)

Drill-Pipe Dart Behind Cement (lands in Disconnect Tool)

2.7/8" Steel Tubing Stinger (2500ft)

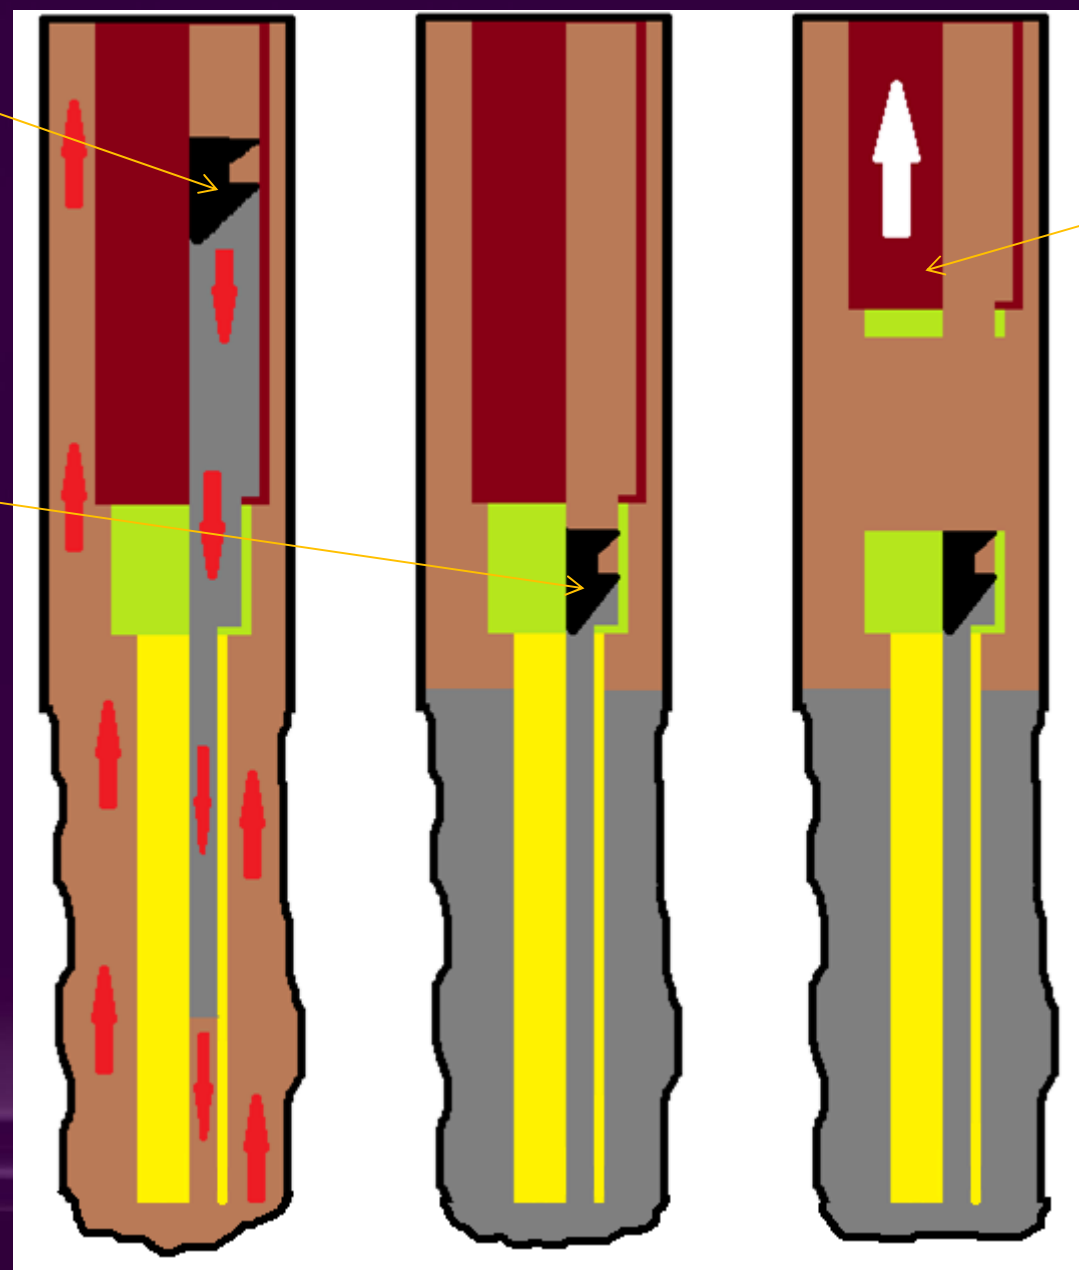

Disconnect Tool Separated

Cement Stinger and some P3 parts left in hole

SUDELAC®

SUDELAC®

Email: [info@sudelac.com](mailto:info@sudelac.com)

[www.sudelac.com](http://www.sudelac.com)